ANTISLIP TRANSPARENT COATING
Clear Non-Slip Finish

SlipSafe
Anti-Slip coatings, treatments, & compliance specialists

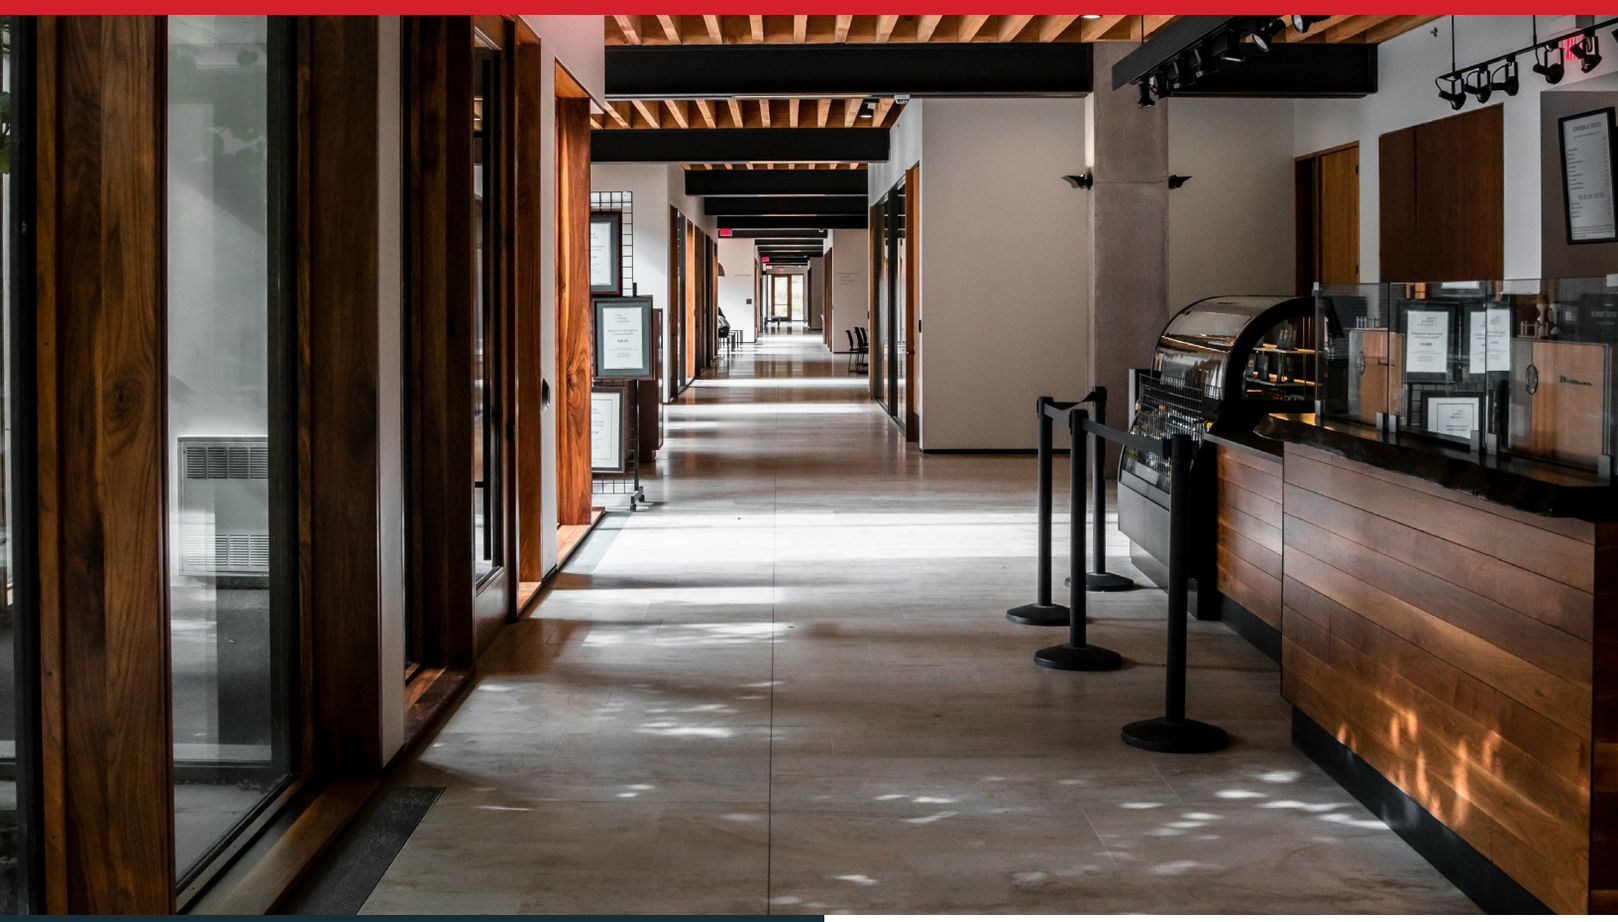

PERFORMANCE FEATURES

- Clear and UV-resistant for minimal visual impact
- Easy application with roller or sprayer
- Independently tested slip resistance
- Compatible with a wide range of surfaces
- Long-lasting performance under high traffic

RECOMMENDED APPLICATIONS

- P3 SOFT | LOBBIES, LIVING AREAS, INTERIOR STAIRS, LIGHT FOOT TRAFFIC INTERIORS
- P3 | BATHROOMS, WET AREAS, INTERIOR STAIRS, SUPERMARKET PRODUCE AREAS
- P4 | EXTERIOR WALKWAYS, RAMPS (<1:14), POOL SURROUNDS, COMMUNAL SHOWERS, BOAT DECKS
- P5 | COMMERCIAL KITCHENS, UNDERCOVER LOADING DOCKS, STEEP RAMPS

COMPLIANCE & CERTIFICATIONS

- Meets NZS 4586:2004 slip resistance requirements (wet pendulum testing)
- Available slip ratings: P3 Soft, P3, P4, P5
- VOC-free, water-based, and non-toxic
- UV-resistant, suitable for interior and exterior use

SLIPSAFE NZ – CONSULTATION & SAMPLES

www.slipsafe.co.nz info@slipsafe.co.nz 0508 754 778

ANTISLIP TRANSPARENT COATING
Clear Non-Slip Finish

SlipSafe
Anti-Slip coatings, treatments, & compliance specialists

INSTALLATION & APPLICATION METHOD

1. Prepare surface by ensuring it is clean, dry, and free of contaminants.
2. Prime using SlipSafe Clear Primer for best adhesion.
3. Stir thoroughly before application.
4. Apply using Peka Multitex roller or approved sprayer.
5. For P5 rating, add SlipSafe P5 additive to P4 mixture.
6. Allow appropriate drying time between coats.

COMPATIBLE SURFACES

TILES


CERAMICS

MARBLE

NATURAL STONE

EPOXY/PU

TIMBER

LAMINATE

FIBREGLASS /GLASS


STEEL

TECHNICAL SPECIFICATIONS

Product Type	Dual-component, water-borne polyurethane coating
Colour	Clear & Transparent / Translucent (glass)
Sheen	Satin
Compatible Surfaces	Tiles, ceramics, marble, natural stone, epoxy, timber, laminate, PU, fibreglass, steel, glass
Coverage	Up to 165 m^2 per 12 kg pack (varies by surface porosity)
Application	Roller (Peka Multitex) or HVLP sprayer (matte option requires dilution)
Primer	SlipSafe Clear Primer recommended for adhesion
Slip Rating	
Dry Time	12 Hours after completion
Longevity	Recoat as required to maintain slip resistance
Chemical Resistant	
Shelf Life	Refer to packaging
Treatment Life	
Storage	Store between 10°C–27°C. Protect from freezing
Expected Service Life	5 years (with proper maintenance)
Maintenance	Clean regularly using SlipSafe Prep & Maintenance Cleaner
Warranty	

SLIPSAFE NZ – CONSULTATION & SAMPLES
www.slipsafe.co.nz info@slipsafe.co.nz 0508 754 778